


Presto FF-C18

150 x 4.6 mm

Application

**Cellulose acetate**

セルロースアセテート

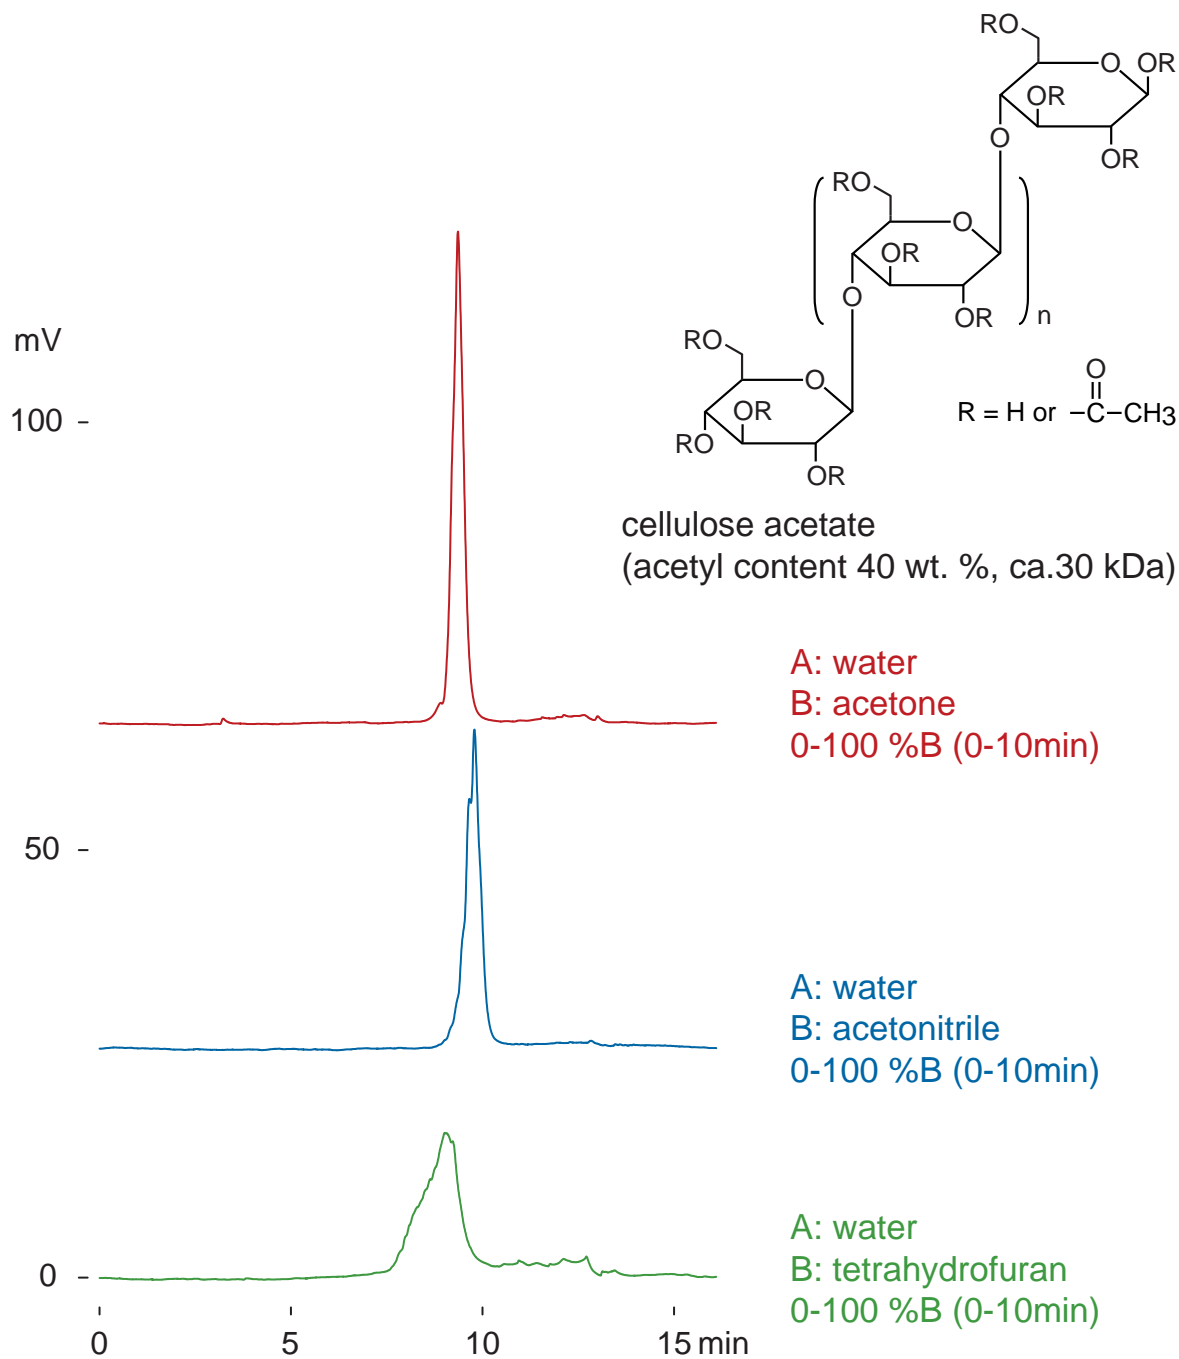

Presto FF-C18, 150 x 4.6 mm  
 0.4 mL/min (11 MPa), 60 deg.C  
 ELSD (spray chamber 50 deg.C, drift tube 100 deg.C)  
 1 uL (5 ug, acetonitrile)