

Intrada SEC

250 x 4.6 mm


Application

SEC: Polystyrene

ポリスチレンのSEC分離

Styrene, Polymer **Intrada SEC**

MW 210 kDa

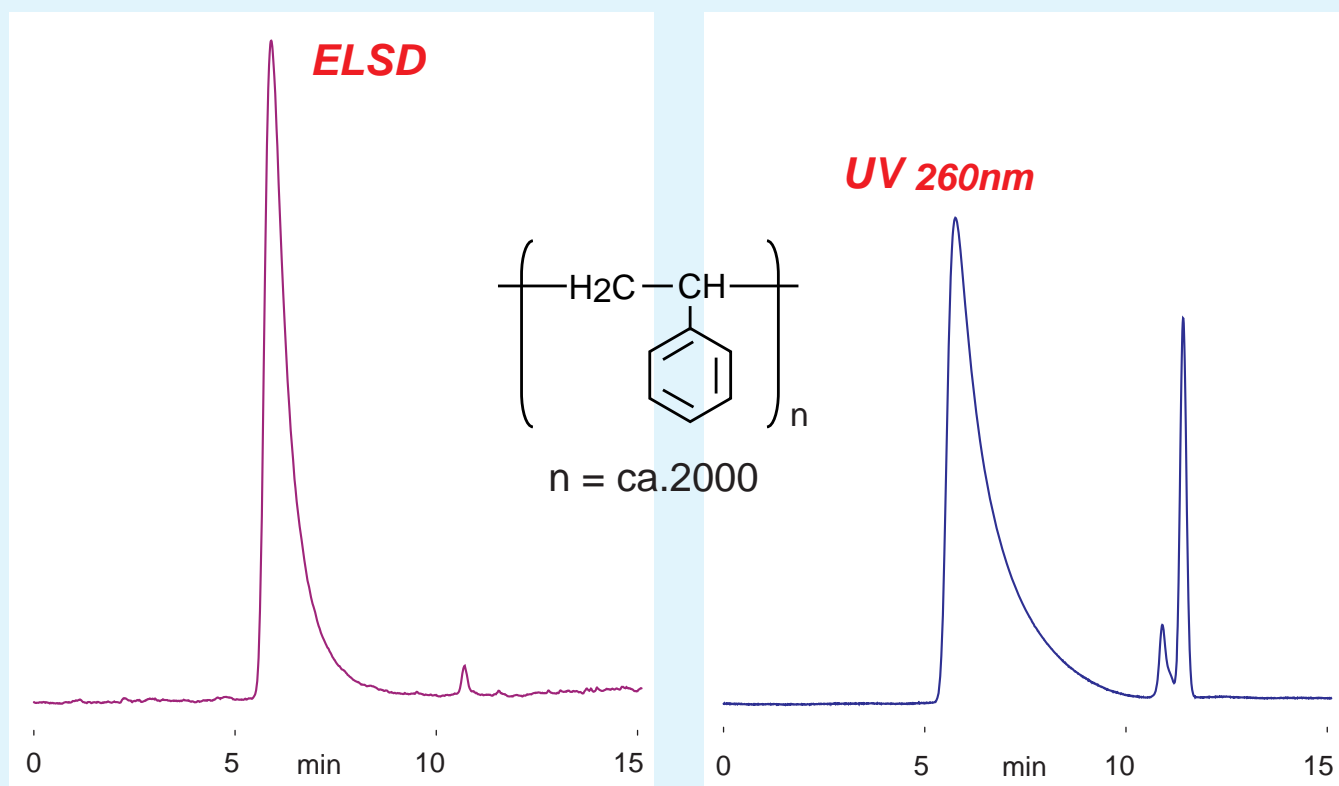

Intrada SEC, 250 x 4.6mm
THF (tetrahydrofuran)
0.3mL/min (3MPa), 37 °C
5 μL (2mg/mL)